

Standard series    Ø max 1/2" - up to 20 m length  
                                  Ø max 3/8" - up to 25 m length



Automatic rewind, spring-driven hose reel, **standard series**, in painted steel or in stainless steel AISI 304, suitable for hoses of max 20 m length (ø hose 1/2") or max 25 m length (ø hose 3/8").

The wetted parts of the painted steel models on demand can also be replaced by stainless steel parts (see pages 217 – 218).

The hose reel is supplied without hoses and can be used with hoses for the supply of oils, antifreeze, grease, compressed air and water.

Please see catalogue pages 220 and 221 for the selection of the required hoses.

On demand the hose reels can also be supplied with a **spring brake kit** (see information at the end of this page!); please add suffix **"/HB"** to the article number (f. ex. 9016/HB)!

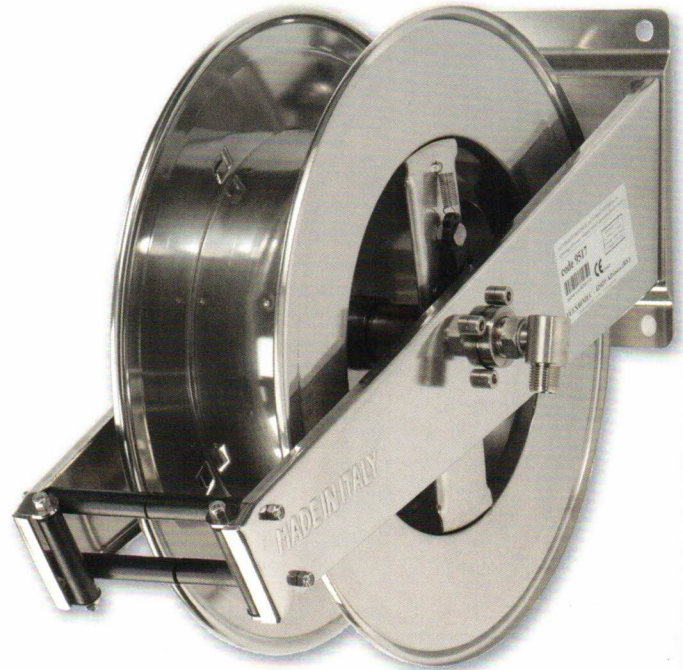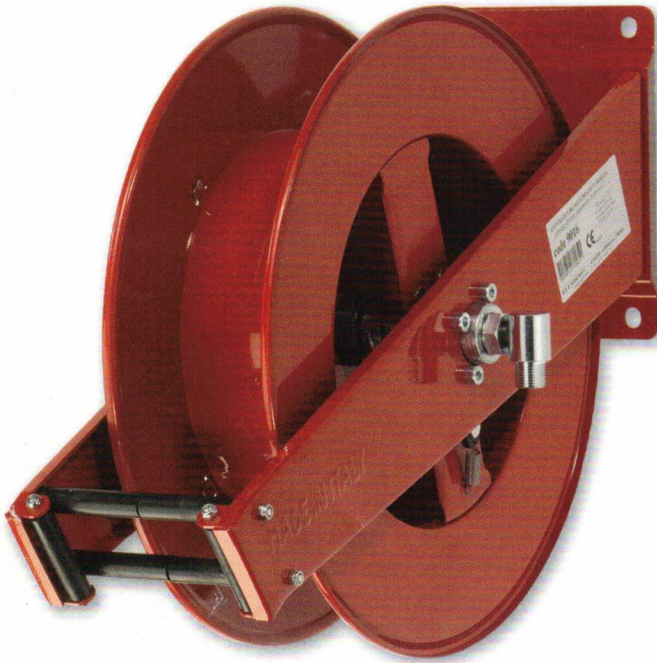

Art.no. **9767**  
Art.no. **9768**



Art.no. **9760**  
Art.no. **9765**



On demand the stainless steel hose reels can also be supplied in accordance with directive ATEX 2014/34/EU - group II - category 2.

Art.no.	Material	Max working pressure	Connection threads IN - OUT	Internal diameter swivel joint	Max diameter hose	Max length hose	Suitable pivoting wall bracket	Included swivel joint	Dimensions (A-B-C) (mm)	Spool width (D)	Weight
<b>9016</b>	Painted steel	600 bar	1/2" (M) - 1/2" (F)	10 mm	1/2"	15 m	9767	9951	215x570x430	120 mm	14 Kg
<b>9021</b>					1/2"	20 m	9768		245x570x430	150 mm	18 Kg
<b>9022</b>					3/8"	25 m	9768		245x570x430	150 mm	19 Kg
<b>9517</b>	Stainless steel AISI 304	200 bar	1/2" (M) - 1/2" (F)	10 mm	1/2"	15 m	9760	9963	215x570x430	120 mm	14 Kg
<b>9521</b>					3/8"	25 m	9765		245x570x430	150 mm	19 Kg
<b>9522</b>					1/2"	20 m	9765		245x570x430	150 mm	18 Kg




Hose Reels

**OPTIONAL**

**/HB Hydraulic spring brake kit (patented)**

Safety device for the controlled rewind of hoses, installable on all spring-driven hose reel models, eliminating the dangers caused by an uncontrolled rewind or a sudden release of the hose when unwinded during its use.

**Patent nr. 0001426967**

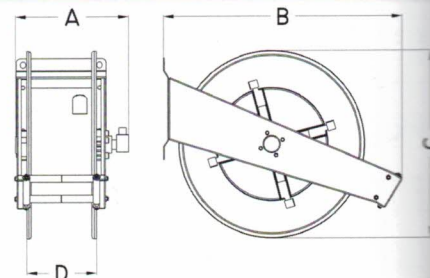

Enclosed series    Ø max 1/2" - up to 20 m length  
 Ø max 3/8" - up to 25 m length

Automatic rewind, spring-driven hose reel, **enclosed series**, in painted steel or in stainless steel AISI 304, suitable for hoses of max 20 m length (Ø hose 1/2") or max 25 m length (Ø hose 3/8"). The wetted parts of the painted steel models on demand can also be replaced by stainless steel parts (see pages 216-218). The hose reel is supplied without hoses and can be used with hoses for the supply of oils, antifreeze, grease, compressed air and water. Please see catalogue pages 220 and 221 for the selection of the required hoses.

On demand the hose reels can also be supplied with a **spring brake kit** (see information at the end of this page!); please add suffix **"/HB"** to the article number (f. ex. 9013/HB)! **Please note: the spring brake kit is available only for art.nos. 9013-9547.**



Art.no. 9778



Art.no. 9754



Art.no.	Material	Max working pressure	Connection threads IN - OUT	Internal diameter swivel joint	Max diameter hose	Max length hose	Suitable pivoting wall bracket	Included swivel joint	Dimensions (A-B-C) (mm)	Spool width (D)	Weight
9013	Painted steel	600 bar	1/2" (M) - 1/2" (F)	10 mm	1/2"	15 m	9778	9951	215x530x470	120 mm	26 Kg
9023		600 bar	1/2" (M) - 1/2" (F)	10 mm	1/2"	20 m				27 Kg	
9024		100 bar	1" (M) - 3/4" (F)	20 mm	3/4"	8 m			26 Kg		
9025		600 bar	1/2" (M) - 1/2" (F)	10 mm	3/8"	25 m			29 Kg		
9546	Stainless steel AISI 304	100 bar	1" (M) - 3/4" (F)	20 mm	3/4"	8 m	9754	9963	245x530x470	150 mm	26 Kg
9547		200 bar	1/2" (M) - 1/2" (F)	10 mm	1/2"	15 m				26 Kg	
9548		200 bar	1/2" (M) - 1/2" (F)	10 mm	1/2"	20 m			27 Kg		
9549		200 bar	1/2" (M) - 1/2" (F)	10 mm	3/8"	25 m			29 Kg		

**OPTIONAL**

**/HB Hydraulic spring brake kit (patented)**

Safety device for the controlled rewind of hoses, installable on all spring-driven hose reel models, eliminating the dangers caused by an uncontrolled rewind or a sudden release of the hose when unwinded during its use.

**Patent nr. 0001426967**

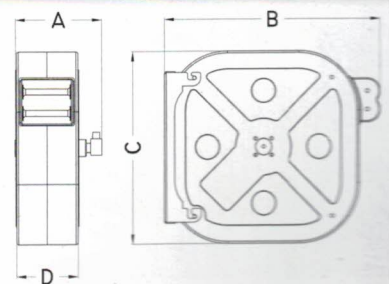

Automatic rewind, spring-driven hose reel, **adjustable arms series**, in painted steel or in stainless steel AISI 304, suitable for hoses of max 25 m length and max diameter of 1/2". The hose reel is supplied without hoses and can be used with hoses for the supply of oils, antifreeze, grease, compressed air and water.


The wetted parts of the painted steel models on demand can also be replaced by stainless steel parts (see pages 216-218).

Please see catalogue pages 220 and 221 for the selection of the required hoses.

On demand the hose reels can also be supplied with a **spring brake kit** (see information at the end of this page!); please add suffix **"/HB"** to the article number (f. ex. 9090/HB)!



Art.no. **9767**  
Art.no. **9768**



Art.no. **9760**  
Art.no. **9765**



On demand the stainless steel hose reels can also be supplied in accordance with directive ATEX 2014/34/EU – group II – category 2.





Art.no.	Material	Max working pressure	Connection threads IN - OUT	Internal diameter swivel joint	Max diameter hose	Max length hose 3/8" - 1/2"	Suitable pivoting wall bracket	Included swivel joint	Dimensions (A-B-C) (mm)	Spool width (D)	Weight
<b>9090</b>	Painted steel	600 bar	1/2" (M) - 1/2" (F)	10 mm	1/2"	15 m	9767	9951	240x560x450	120 mm	12 kg
<b>9091</b>						20 m - 15 m					15 kg
<b>9092</b>						25 m - 20 m	9768		270x560x450	150 mm	16 kg
<b>9093</b>						25 m			303x560x450	200 mm	19 kg
<b>9590</b>	Stainless steel AISI 304	200 bar	1/2" (M) - 1/2" (F)	10 mm	1/2"	15 m	9760	9963	240x560x450	120 mm	12 kg
<b>9591</b>						20 m - 15 m					15 kg
<b>9592</b>						25 m - 20 m	9765		270x560x450	150 mm	16 kg
<b>9593</b>						25 m			303x560x450	200 mm	19 kg

**OPTIONAL**

**/HB Hydraulic spring brake kit (patented)**

Safety device for the controlled rewind of hoses, installable on all spring-driven hose reel models, eliminating the dangers caused by an uncontrolled rewind or a sudden release of the hose when unwinded during its use.

**Patent nr. 0001426967**





Automatic rewind, spring-driven hose reel, **adjustable arms series**, in painted steel or in stainless steel AISI 304, suitable for hoses of max 40 m length (hose max. 1/2").

The hose reel is supplied without hoses and can be used with hoses for the supply of oils, antifreeze, grease, compressed air and water.

The wetted parts of the painted steel models on demand can also be replaced by stainless steel parts (see pages 216-218).

Please see catalogue pages 220 and 221 for the selection of the required hoses.

On demand the hose reels can also be supplied with a **spring brake kit** (see information at the end of this page!); please add suffix **"/HB"** to the article number (f. ex. 9074/HB)!

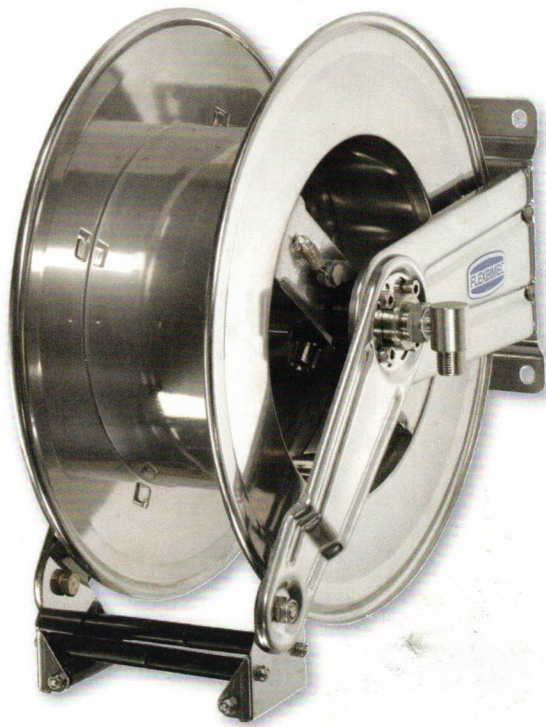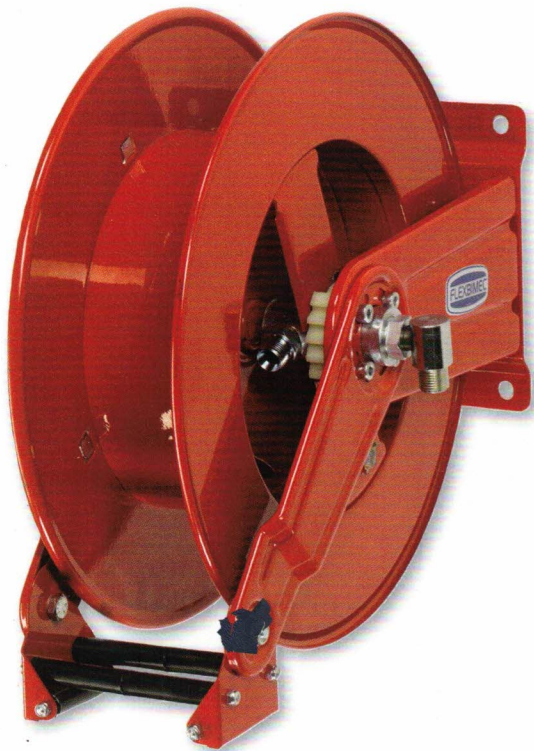

Art.no. **9777**



Art.no. **9770**

On demand the stainless steel hose reels can also be supplied in accordance with directive ATEX 2014/34/EU – group II – category 2.




Art.no.	Material	Max working pressure	Connection threads IN - OUT	Internal diameter swivel joint	Max diameter hose	Max length hose	Suitable pivoting wall bracket	Included swivel joint	Dimensions (A-B-C) (mm)	Spool width (D)	Weight
<b>9074</b>	Painted steel	600 bar	1/2" (M) - 1/2" (F)	10 mm	1/2"	30 m	9777	9951	370x590x600	150 mm	25 kg
<b>9083</b>						35 m					26 kg
<b>9073</b>						40 m					30 kg
<b>9574</b>	Stainless steel AISI 304	200 bar	1/2" (M) - 1/2" (F)	10 mm	1/2"	30 m	9770	9963	370x590x600	150 mm	25 kg
<b>9530</b>						35 m					26 kg
<b>9573</b>						40 m					30 kg

**OPTIONAL**

**/HB Hydraulic spring brake kit (patented)**

Safety device for the controlled rewind of hoses, installable on all spring-driven hose reel models, eliminating the dangers caused by an uncontrolled rewind or a sudden release of the hose when unwinded during its use.

**Patent nr. 0001426967**






Automatic rewind, spring-driven hose reel, **adjustable arms series with twin spring**, in painted steel or in stainless steel AISI 304, suitable for hoses of max 60 m (Ø hose max. 1/2").

The hose reel is supplied without hoses and can be used with hoses for the supply of oils, antifreeze, grease, compressed air and water at low and high pressure.

Please see catalogue pages 220 and 221 for the selection of the required hoses.

On demand the hose reels can also be supplied with a **spring brake kit** (see information at the end of this page!); please add suffix **"/HB"** to the article number (f. ex. 9086/HB)!



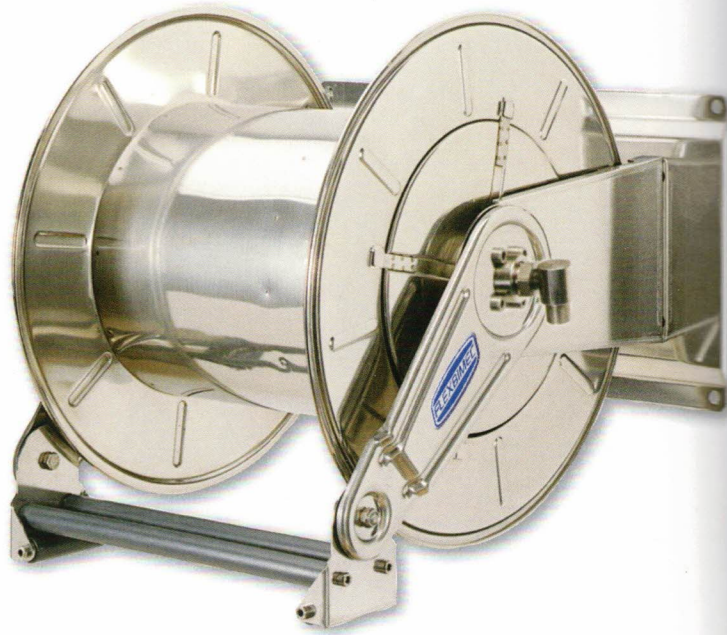
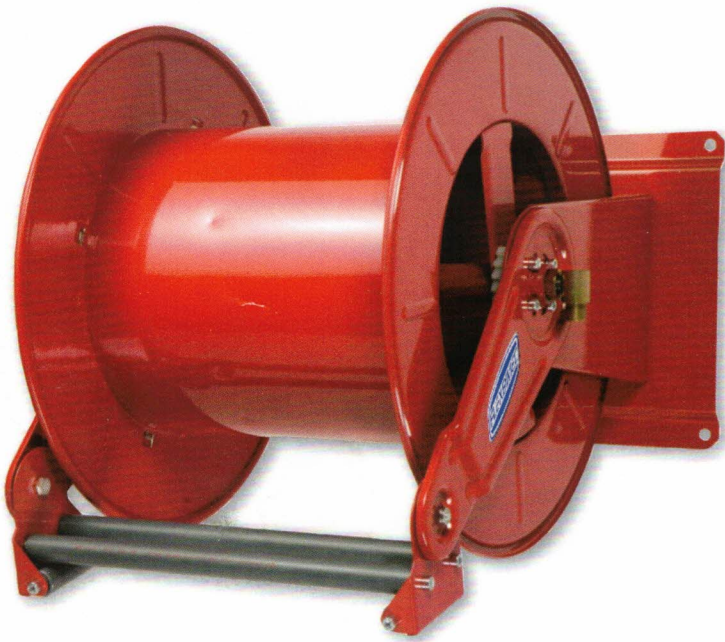


Art.no.	Material	Max working pressure	Connection threads IN - OUT	Internal diameter swivel joint	Max diameter hose	Max length hose	Included swivel joint	Dimensions (A-B-C) (mm)	Spool width (D)	Weight
<b>9086</b>	Painted steel	600 bar	1/2" (M) - 1/2" (F)	10 mm	1/2"	60 m	9951	650x650x600	400 mm	50 Kg
<b>9586</b>	Stainless steel AISI 304	200 bar					9963			




### OPTIONAL

#### /HB Hydraulic spring brake kit (patented)

Safety device for the controlled rewind of hoses, installable on all spring-driven hose reel models, eliminating the dangers caused by an uncontrolled rewind or a sudden release of the hose when unwinded during its use.  
**Patent nr. 0001426967**



Automatic rewind, spring-driven hose reel, **adjustable arms series with triple spring**, in painted steel or in stainless steel AISI 304, suitable for hoses max 100 m (Ø hose max. 1/2").  
 The hose reel is supplied without hoses and can be used with hoses for the supply of oils, antifreeze, grease, compressed air and water at low and high pressure.  
 Please see catalogue pages 220 and 221 for the selection of the required hoses.  
 On demand the hose reels can also be supplied with a **spring brake kit** (see information at the end of this page!); please add suffix **"/HB"** to the article number (f. ex. 9088/HB)!

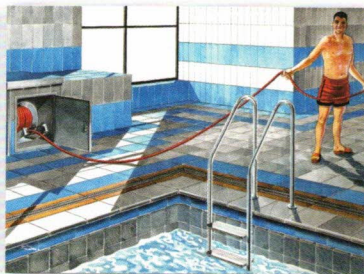
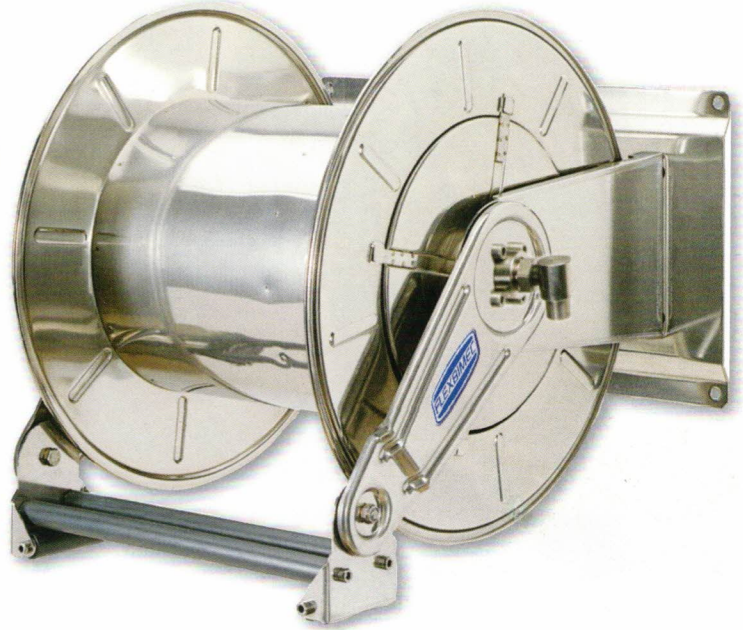
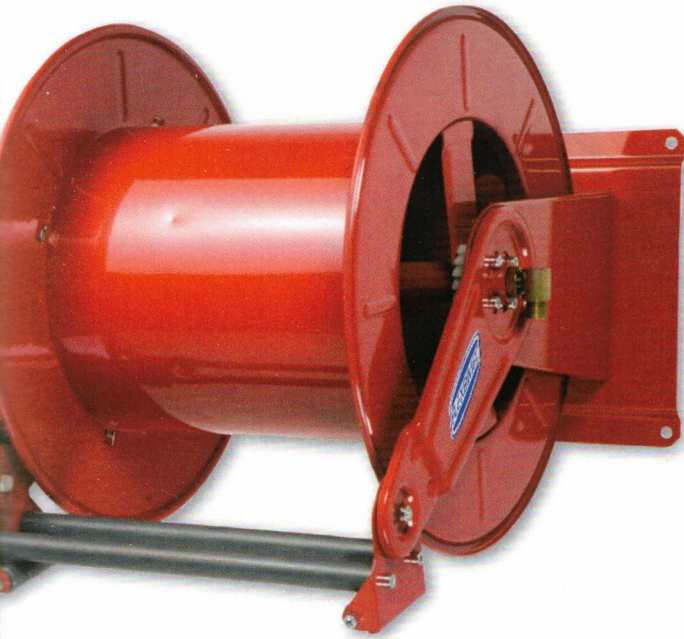


  
 On demand the stainless steel hose reels can also be supplied in accordance with directive ATEX 2014/34/EU – group II – category 2.

No.	Material	Max working pressure	Connection threads IN - OUT	Internal diameter swivel joint	Max diameter hose	Max length hose	Included swivel joint	Dimensions (A-B-C) (mm)	Spool width (D)	Weight
9088	Painted steel	600 bar	1/2" (M) - 1/2" (F)	10 mm	1/2"	100 m	9951	650x650x590	400 mm	70 Kg
9089	Stainless steel AISI 304	200 bar					9963			

**OPTIONAL**

**/HB Hydraulic spring brake kit (patented)**  
 Safety device for the controlled rewind of hoses, installable on all spring-driven hose reel models, eliminating the dangers caused by an uncontrolled rewind or a sudden release of the hose when unwinded during its use.  
**Patent nr. 0001426967**





Adjustable arms series  $\varnothing$  max 3/4" – up to 18 m length  
 $\varnothing$  max 1" – up to 15 m length

Automatic rewind, spring-driven hose reel, **adjustable arms series**, in painted steel or in stainless steel AISI 304, suitable for hoses of max 18 m length ( $\varnothing$  hose 3/4") or max. 15 m length ( $\varnothing$  hose 1").

The wetted parts of the painted steel models on demand can also be replaced by stainless steel parts (see pages 216-218).

The hose reel is supplied without hoses and can be used with hoses for the supply of oils, antifreeze, diesel, compressed air and water. Please see catalogue pages 220 and 221 for the selection of the required hoses.

On demand the hose reels can also be supplied with a **spring brake kit** (see information at the end of this page!); please add suffix **"/HB"** to the article number (f. ex. 9095/HB)!

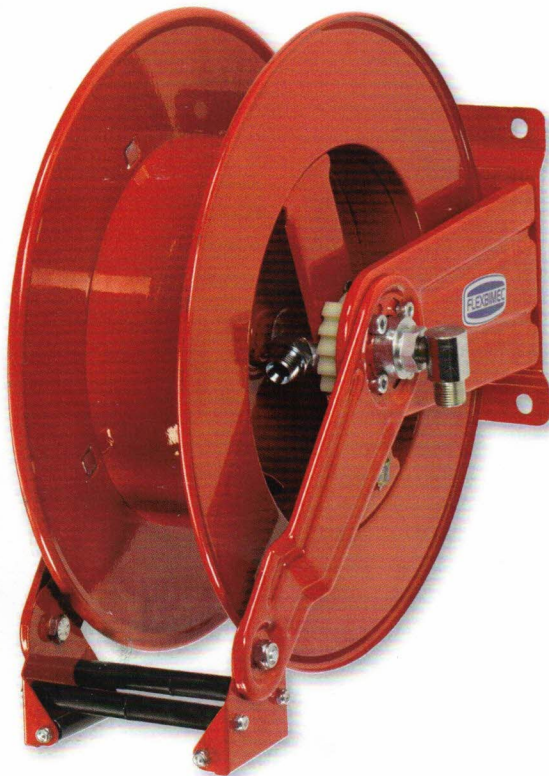

Art.no. **9768**  
Art.no. **9769**



Art.no. **9764**  
Art.no. **9765**



On demand the stainless steel hose reels can also be supplied in accordance with directive ATEX 2014/34/EU - group II - category 2.



Art.no.	Material	Max working pressure	Connection threads IN - OUT	Internal diameter swivel joint	Max diameter hose	Max length hose 3/4" - 1"	Suitable pivoting wall bracket	Included swivel joint	Dimensions (A-B-C) (mm)	Spool width (D)	Weight
<b>9095</b>	Painted steel	100 bar	1" (M) - 1" (F)	20 mm	1"	10 m - 8 m	9768	9969	270x500x490	150 mm	14 kg
<b>9096</b>						15 m - 12 m			305x490x490	200 mm	22 kg
<b>9097</b>						18 m - 15 m	9769		505x530x500	300 mm	24 kg
<b>9595</b>						10 m - 8 m	9765		270x500x490	150 mm	14 kg
<b>9596</b>	15 m - 12 m	305x490x490	200 mm	22 kg							
<b>9584</b>	Stainless steel AISI 304	100 bar	1" (M) - 1" (F)	20 mm	1"	18 m - 15 m	9764	9986	505x530x500	300 mm	24 kg

### OPTIONAL

#### /HB Hydraulic spring brake kit (patented)


Safety device for the controlled rewind of hoses, installable on all spring-driven hose reel models, eliminating the dangers caused by an uncontrolled rewind or a sudden release of the hose when unwinded during its use.

**Patent nr. 0001426967**

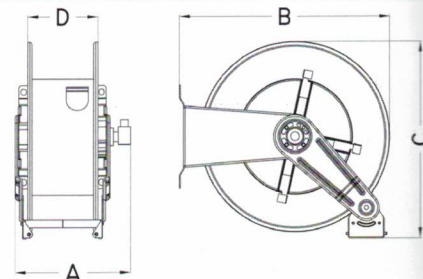


Adjustable arms series with twin spring  $\varnothing$  max 3/4" - up to 30 m length  
 $\varnothing$  max 1" - up to 20 m length

Automatic rewind, spring-driven hose reel, **adjustable arms series with twin spring**, in painted steel or in stainless steel AISI 304, suitable for hoses max 30 m length ( $\varnothing$  hose 3/4") or max. 20 m length ( $\varnothing$  hose 1").  
 The wetted parts of the painted steel models on demand can also be replaced by stainless steel parts (see pages 216-218).  
 The hose reel is supplied without hoses and can be used with hoses for the supply of oils, diesel, compressed air and water.  
 Please see catalogue pages 220 and 221 for the selection of the required hoses. On demand the hose reels can also be supplied with a **spring brake** (see information at the end of this page!); please add suffix **"/HB"** to the article number (f. ex. 9070/HB)!



Art.no. **9777**  
Art.no. **9769**





Art.no. **9770**  
Art.no. **9764**

On demand the stainless steel hose reels can also be supplied in accordance with directive ATEX 2014/34/EU - group II - category 2.

Art. no.	Material	Max working pressure	Connection threads IN - OUT	Internal diameter swivel joint	Max diameter hose	Max length hose 3/4" - 1"	Suitable pivoting wall bracket	Included swivel joint	Dimensions (A-B-C) (mm)	Spool width (D)	Weight
984	Painted steel	100 bar	1" (M) - 1" (F)	20 mm	1"	20 m - 15 m	9777	9969	270x600x590	150 mm	27 kg
998						25 m - 18 m			370x640x600	200 mm	30 kg
970						30 m - 20 m			450x540x600	300 mm	38 kg
934	Stainless steel AISI 304					20 m - 15 m	9770	9986	270x600x590	150 mm	27 kg
998						25 m - 18 m			370x640x600	200 mm	30 kg
970						30 m - 20 m			450x540x600	300 mm	38 kg

**OPTIONAL**

**/HB Hydraulic spring brake kit (patented)**  
 Safety device for the controlled rewind of hoses, installable on all spring-driven hose reel models, eliminating the dangers caused by an uncontrolled rewind or a sudden release of the hose when unwinded during its use.  
**Patent nr. 0001426967**

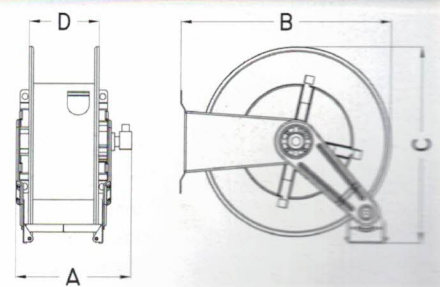

Hose Reels